


# Nokian Country King



## STABLE AND VERSATILE FLOTATION TYRE

An efficient and durable flotation tyre for large agricultural machines and trailers. Thanks to good cleaning properties, high load-bearing capacity and low rolling resistance, the tyre moves lightly and economically.

- › A versatile and easily cleaning flotation tyre
- › High load-bearing capacity, sturdy and comfortable driving
- › Low rolling resistance lowers fuel consumption

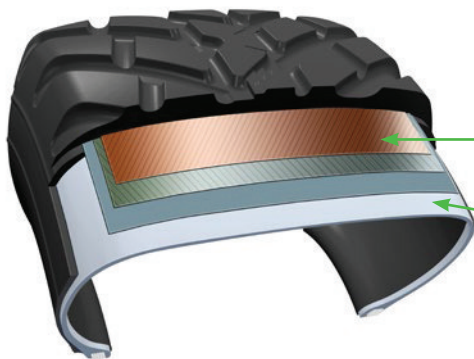

Tyre carcass is stabilized by an inextensible circumferential belt. (SB = steel belt)

Ply cords are laid substantially at 90° to the centerline of the tread.

## NOKIAN COUNTRY KING

D = 65 km/h / 40 mph

Size	LI / SS	Pattern	TT / TL	Rim	Permitted rims	Width		Diameter		Loaded static radius		Rolling circumference		Maximum inflation pressure		Load capacity kg / lb				Product code
						mm / in	mm / in	mm±2,5% / in±2,5%	mm±2,5% / in±2,5%	kPa / p.s.i.	kPa / p.s.i.	40 km/h / 25 mph	65 km/h / 40 mph	kg / lb	kg / lb					
710/35R22.5	157 D	Country King	TL	AG 24.00	24.00	712	28.0	1 069	42.1	484	19.1	3 248	127.9	400	58	5 620	10 670	4 125	9 095	T445542
560/45R22.5	152 D	Country King	TL	AG 16.00	16.00	564	22.2	1 076	42.4	474	18.7	3 280	129.1	400	58	4 840	10 670	3 550	7 825	T445402
500/60R22.5	155 D	Country King	TL	AG 16.00	14.00, 15.00, 16.00, 17.00	503	19.8	1 172	46.1	521	20.5	3 581	141.0	400	58	5 280	11 640	3 875	8 545	T445453
600/50R22.5	159 D	Country King	TL	AG 20.00	20.00	600	23,6	1 172	46,1	533	21,0	3 575	140,7	400	58	5 960	13 140	4 375	9 645	T445441
710/45R22.5	165 D	Country King	TL	AG 24.00	24.00	727	28.6	1 212	47.7	545	21.5	3 695	145.5	400	58	7 050	15 540	5 150	11 355	T445496
650/50R22.5	163 D	Country King	TL	AG 20.00	20.00	645	25,4	1 237	48,7	564	22,2	3 789	149,2	400	58	6 650	14 660	4 875	10 745	T445407
560/60R22.5	161 D	Country King	TL	AG 16.00	15.00, 16.00, 17.00, 20.00	564	22.2	1 244	49.0	557	21.9	3 764	148.2	400	58	6 300	13 890	4 625	10 195	T445401
580/65R22.5	166 D	Country King	TL	AG 16.00	18.00	577	22.7	1 300	51.2	586	23.1	3 977	156.6	400	58	7 250	15 985	5 300	11 685	T445405
620/60R26.5	169 D	Country King	TL	AG 20.00	20.00	625	24.6	1 400	55.1	639	25.2	4 291	168.9	400	58	7 900	17 415	5 800	12 785	T445404
710/50R26.5	170 D	Country King	TL	AG 24.00	20.00, 24.00	727	28.6	1 405	55.3	646	25.4	4 304	169.4	400	58	8 200	18 080	6 000	13 230	T445406
650/65R26.5	174 D	Country King	TL	AG 20.00	20.00	645	25.4	1 518	59.8	689	27.1	4 656	183.3	400	58	9 150	20 170	6 700	14 770	T445440

**Notice!** When more on road than on field choose Nokian Country King. If more on field consider also Nokian ELS Radial.

**Notice!** Table sizes in order by diameter.

### TREAD DEPTH

Size	LI / SS / PR	Pattern	Total tread depth		Tread depth measured on top of tie-bar	
			mm	32 nds in	mm	32 nds in
710/35R22.5	157 D	Country King	22	28	19	24
560/45R22.5	152 D	Country King	16	20	13	16
500/60R22.5	155 D	Country King	17	21	14	18
600/50R22.5	160 D	Country King	18	23	15	19
710/45R22.5	165 D	Country King	22	28	19	24
650/50R22.5	165 D	Country King	18	23	15	19
560/60R22.5	161 D	Country King	18	23	15	19
580/65R22.5	166 D	Country King	19	24	16	20
620/60R26.5	169 D	Country King	20	25	17	21
710/50R26.5	170 D	Country King	20	25	17	21
650/65R26.5	174 D	Country King	20	25	17	21

#### Tread depth indicator



- Remaining tread depth in mm
- Tread depth measuring point on top of tie-bar
- Total tread depth measuring point